



Quantum® Hardcoated Polycarbonate
VStream® Windscreen
N20804 Low Dark Tint
N20805 Low Light Tint
N20806 Mid Clear
For KTM 1290 Super Duke GT

Thank you for purchasing a National Cycle product. Read these instructions carefully and thoroughly before beginning work. Dealers, if installing this windscreen for a customer, please give them this manual. It contains information needed to properly maintain and use this product.



Attention:

Special notes and cautionary measures which can prevent damage to the accessory or motorcycle.



Note:

Tips for facilitation of operation, control and adjustment, as well as maintenance work.

CONTENTS OF KIT

Item	Description	Part No.	Qty.	Notes and Tools
1	VStream® Windscreen		1	All Stock Hardware Will Be Re-used
BAG#1283				
2	Standoff, Long	34-350754-000	2	Use In Upper Holes, Box Wrench
3	Standoff, Short	34-350753-000	2	Use In Lower Holes, Box Wrench
4	Washer, Poron	44-447635-000	4	



PREPARATION

1. Place motorcycle securely on its side stand.
2. Remove the upper and lower screws holding the stock windscreen. **(T30 Torx Wrench)**

Figure 1



Stock screws will be re-used.

Figure 1

National Cycle, Inc. PO Box 158 Maywood, IL 60153-0158 USA

708-343-0400 / Fax: 708-343-0625 / www.nationalcycle.com / e-mail: info@nationalcycle.com

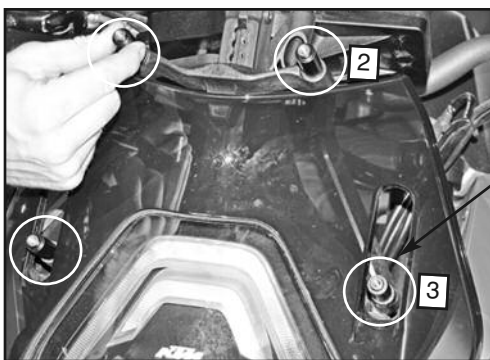


Figure 2




Figure 2, Inset

INSTALLATION

Install Upper and Lower Standoffs

1. Thread the Upper (2) and Lower (3) Standoffs into the Stock Bracket Arm.

 **Protect the Standoffs with a piece of painters tape or electrical tape, to keep the paint from being chipped during installation.**

2. Firmly tighten the Standoffs, taking care not to over-tighten. **(1/2" Box Wrench) Figure 2**

3. Remove protective liner from a Poron Washer (4). Install 1 washer (4) to each Stand-off. **Figure 2 Inset**

Install Windscreen

3. Use the 4, OEM M5 x 12 Screws to install the VStream Windscreen to the Standoffs. Tighten screws firmly. **(T30 Torx Wrench) Figure 3**



Figure 3



Adjusting Windshield Height

 **Adjust windshield height using the windshield carrier bracket. Use two hands to firmly grasp the carrier bracket, adjust Windshield.**

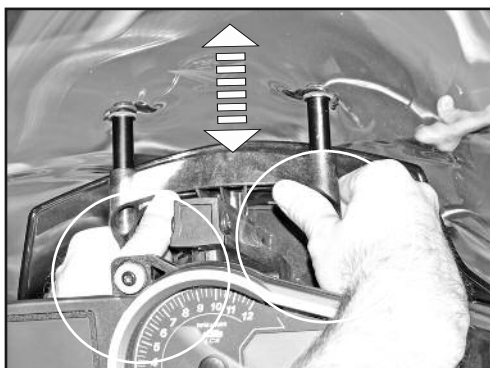


Figure 4



Enjoy your new VStream® Windshield

CLEANING AND MAINTENANCE To clean the screen, wash with a clean soft cloth, plenty of warm water and if necessary, a non-abrasive soap such as dishwashing liquid. Flannel or soft chamois make good cleaning cloths. **Paint, glue residue or grease removal:** Moisten cotton with naphtha or turpentine followed by a wash as above. National Cycle **Shield Wash™** (N1401-01) makes a good daily cleaner and comes with a handy travel size bottle. Shield Wash is safe for all windshields and helmet visors.

Do not clean polycarbonate in hot sun or high temperatures. Do not clean the screen with glass cleaners.

Do not allow brake fluid, alcohol, or strong solvents to contact the screen.

RAIN REPELLENT Do not use rain protective products made for glass. We recommend National Cycle's **RainZip®** (N1410-01) to keep your windscreen clear in rainy weather.

WARNING

Never ride your motorcycle with loose accessory mounting hardware. Check the hardware for tightness regularly.

Today's motorcycles are built with enough frame rigidity to withstand the moderate loads imposed on them by the foreseeable addition of an accessory(ies). If an accessory(ies) adversely affects your motorcycle's stability, immediately remove the accessory(ies). Do not ride a motorcycle that exhibits unsafe handling traits.

Have experienced service personnel correct any problem before riding with the accessory(ies) installed. For further questions concerning handling problems associated with an accessory(ies), contact your dealer, motorcycle manufacturer, or accessory manufacturer.

Sunlight reflected off the inside curvature of the windscreen can, at certain times of day, cause extreme heat buildup on the motorcycles instruments and possibly even melt them. Exercise care in parking to avoid this. Park your motorcycle facing the sun or place an opaque object over this area.



Register your windshield online at www.nationalcycle.com

National Cycle 3-Year Limited Warranty

National Cycle hereby warrants to the original registered owner of a National Cycle polycarbonate windshield for a period of three years from the date of purchase against breakage. This limited warranty is expressly limited to the replacement of the polycarbonate windscreen. This limited warranty does not include scratches, coating failure, cosmetic wear and tear, replacement of hardware, or any consequential damages or expenses including labor cost of installation, removal and/or replacement, inconvenience, inbound freight expenses or damage to any other component of the motorcycle or any other accessories. Certain chemicals, generally known as acidic hydrocarbons, are known to cause polycarbonate damage and will not be covered under this limited warranty. Please refer to the cleaning instructions supplied with all National Cycle windshields.

Visit www.nationalcycle.com for further details, or call or write National Cycle

VStream® windshield patent no. 7,387,328

National Cycle, Inc. PO Box 158 Maywood, IL 60153-0158 USA

708-343-0400 / Fax: 708-343-0625 / www.nationalcycle.com / e-mail: info@nationalcycle.com